




## Technical Specifications

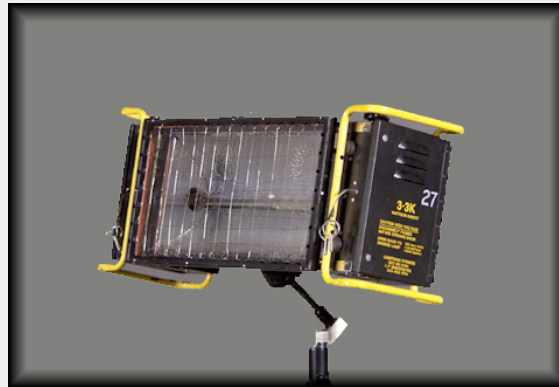

### 3.3K Soft Sun

#### Head

Wattage	3,300
Lamp Type	ESL
Color Temperature	5400°K
CRI	96
Dimensions	26" w x 12" h x 9" d (65 x 30 x 23 cm)
Weight	24 lbs (11 Kg)

#### Power Supply – Flicker Free

Input Power	200-250VAC
50/60HZ	Single Phase
Power Consumption	30 Amps
Dimensions	10" x 12" x 24" (25 x 30 x 65 cm)
Weight	29lbs. (13 Kg)

### Photometrics in Foot Candles

Beam Angle (Spot) 15° Vertical 120° Horizontal

5ft	10ft`	25ft	50ft	75ft	100ft	150ft	200ft
5,500	2,200	88	22	10	4.5	N/A	N/A

Beam Angle (Flood) 53° Vertical 120° Horizontal

5ft	10ft`	25ft	50ft	75ft	100ft	150ft	200ft
1,080	275	44	11	5	2.2	N/A	N/A

Both of the 3.3K and 3.6K units share our generation III power supply. This unit offers quiet, reliable operation in a light-weight, easy to use, rugged weather-resistant package. The power supply also features built-in DMX and accurate digital light level readout.

***LIGHTNING STRIKES!***  
800-321-3644

6601 Santa Monica Blvd., Hollywood, CA 90038 Tel: 323 461-6361 / Fax: 323 461-3067