

100K SoftSun® Linear



HEAD

Wattage	100,000
Lamp Type	Enhanced Spectrum Plasma™
Color Temperature	5000°Kelvin
CRI	+96
Dimensions	118" w x 33" h x 22" d (295 x 825 x 55 cm)
Weight	320 Pounds (145 Kilograms)



POWER SUPPLY – Flicker Free (DC)

The 50K and 100K SoftSun® lights utilize the same DC Flicker-Free power supply.

Input Power	380 or 480 Volts AC
50/60 Hertz	Three Phase
Power Consumption	265 Amps
Dimensions	25" w x 30" h x 45" d (62 x 75 x 113 cm)
Weight	440 Pounds (200 Kilograms)



Beam Spread

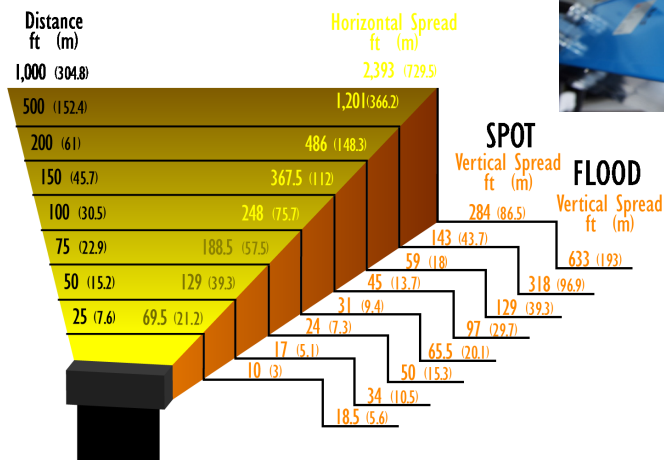

Photometrics

ftc	spot	8,330	2,400	1,111	630	278	151	24	6
	flood	3,830	1,147	526	297	131	62	12	3
	feet	25	50	75	100	150	200	500	1,000
	meters	7.6	15.2	22.9	30.5	45.7	61	152.4	304.8
lux	spot	89,663	25,833	11,959	6,781	2,992	1,625	258	64
	flood	41,226	12,346	5,662	3,197	1,410	667	129	3

LUMINYS

Luminys Systems Corp
11961 Sherman Road
North Hollywood, CA 91605
Direct 323-461-6361
Toll Free 800-321-3644
www.luminyscorp.com

facebook.com/luminys
 @LuminysCorp
 /LuminysSystems