


# 3.3K SoftSun<sup>®</sup> Linear



## HEAD

Wattage	3,300
Lamp Type	Enhanced Spectrum Plasma™
Color Temperature	5000° Kelvin
CRI	+96
Dimensions	28" w x 12" h x 9.5" d (71 x 31 x 24cm)
Weight	24 Pounds (11 Kilograms)

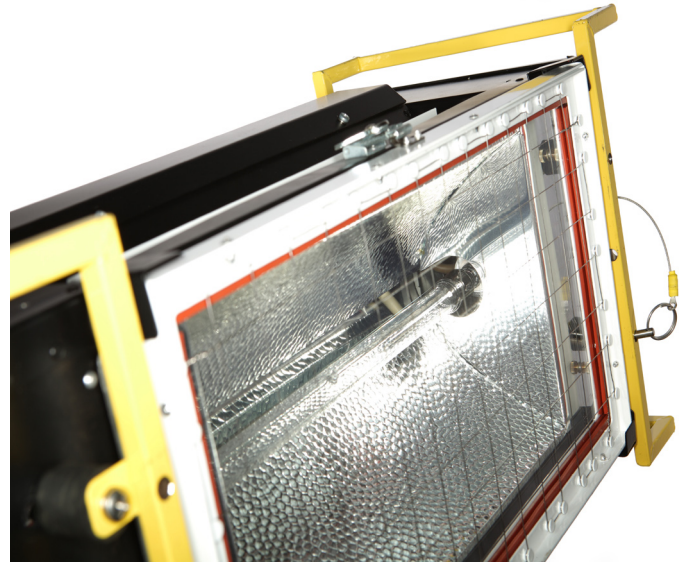


## POWER SUPPLY

Both of the 3.3K and 3.6K units share our generation III power supply. This unit offers quiet, reliable operation in a light-weight, easy to use, rugged weather-resistant package. The power supply also features built-in DMX and accurate digital light level readout.

Input Power	200/250 Volts AC
50/60 Hertz	Single Phase
Power Consumption	36 Amps
Dimensions	9" w x 28" h x 10.5" d (23 x 71 x 27 cm)
Weight	35 Pounds (15.9 Kilograms)



## Beam Spread

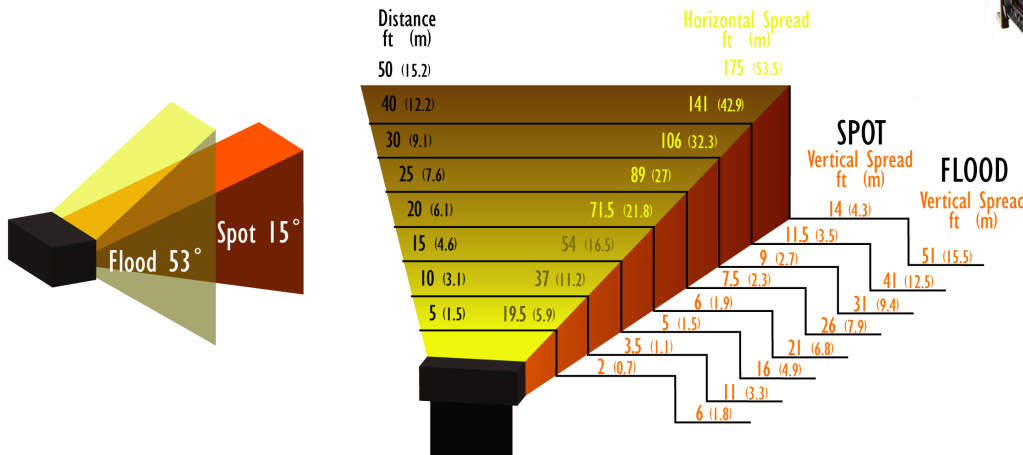

## Photometrics

ftc	spot	5,500	1,400	611	344	220	153	86	55
	flood	1,080	275	122	69	44	31	17	11
	feet	5	10	15	20	25	30	40	50
	meters	1.5	3.1	4.6	6.1	7.6	9.1	12.2	15.2
lux	spot	59,201	15,069	6,577	3,700	2,368	1,644	925	592
	flood	11,625	2,960	1,316	740	474	329	185	118



Luminys Systems Corp  
 11961 Sherman Road  
 North Hollywood, CA 91605  
 Direct 323-461-6361  
 Toll Free 800-321-3644  
 www.luminyscorp.com

