


3.6K SoftSun[®] Cylinder



HEAD

Wattage	3,600
Lamp Type	Enhanced Spectrum Plasma™
Color Temperature	5000° Kelvin
CRI	+96
Dimensions	42" w x 8" round (107 x 20cm)
Weight	21 Pounds (9.5 Kilograms)

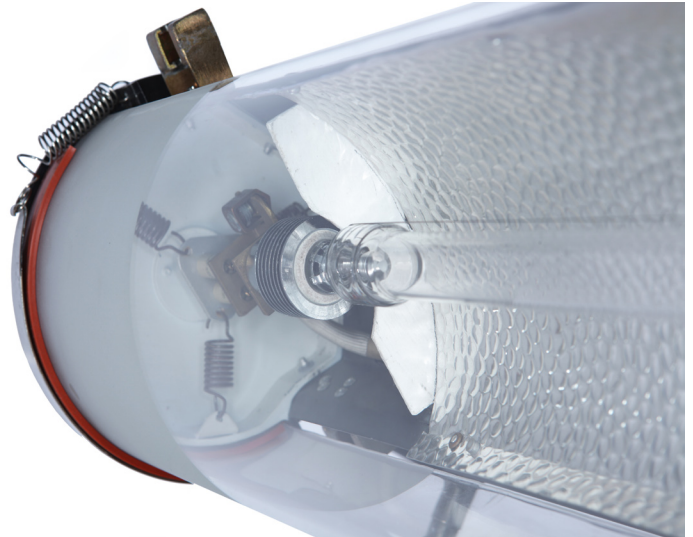


POWER SUPPLY

Both of the 3.3K and 3.6K units share our generation III power supply. This unit offers quiet, reliable operation in a light-weight, easy to use, rugged weather-resistant package. The power supply also features built-in DMX and accurate digital light level readout.

Input Power	200/250 Volts AC
50/60 Hertz	Single Phase
Power Consumption	36 Amps
Dimensions	9" w x 28" h x 10.5" d (23 x 71 x 27 cm)
Weight	35 Pounds (15.9 Kilograms)



Beam Spread

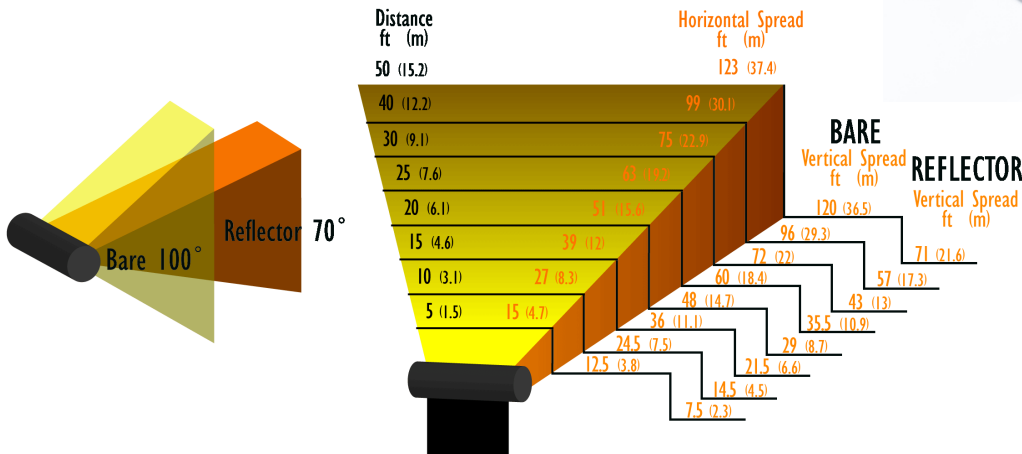

Photometrics

ftc	bare	720	210	103	60	40	30	15.5	10
		reflector	960	300	160	95	60	44	23
feet	5	10	15	20	25	30	40	50	
	meters	1.5	3.1	4.6	6.1	7.6	9.1	12.2	15.2
lux	bare	7,750	2,260	1,109	646	431	323	167	108
	reflector	10,333	3,229	1,722	1,023	646	474	248	162



Luminys Systems Corp
 11961 Sherman Road
 North Hollywood, CA 91605
 Direct 323-461-6361
 Toll Free 800-321-3644
 www.luminyscorp.com

facebook.com/luminys
 @LuminysCorp
 /LuminysSystems