

50K SoftSun® Linear




HEAD

Wattage	50,000
Lamp Type	Enhanced Spectrum Plasma™
Color Temperature	5000° Kelvin
CRI	+96
Dimensions	82" w x 33" h x 23" d (205 x 83 x 58 cm)
Weight	210 Pounds (95 Kilograms)


POWER SUPPLY – Flicker Free (DC)

The 50K and 100K SoftSun® lights utilize the same DC Flicker-Free power supply.

Input Power	208-240 or 380 Volts AC
50/60 Hertz	Three Phase
Power Consumption	225 Amps
Dimensions	25" w x 30" h x 45" d (62 x 75 x 113 cm)
Weight	440 Pounds (200 Kilograms)

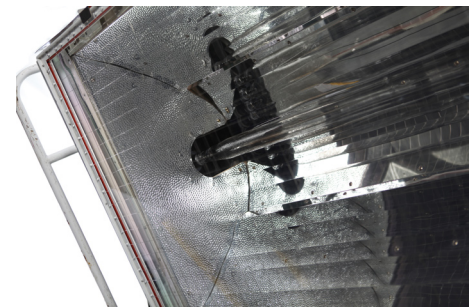

Beam Spread

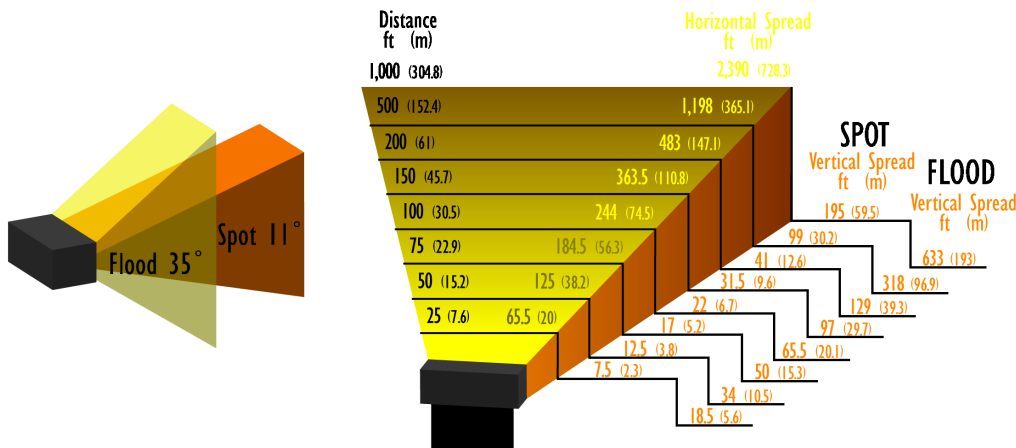

Photometrics

ftc	spot	4,000	1,140	530	303	133	85	12	3
	flood	1,840	545	251	143	63	35	5.7	1.4
feet		25	50	75	100	150	200	500	1,000
	meters	7.6	15.2	22.9	30.5	45.7	61	152.4	304.8
lux	spot	43,055	12,271	5,705	3,261	1,432	915	129	32
	flood	19,806	5,866	2,702	1,539	678	377	61	15



Luminys Systems Corp
 11961 Sherman Road
 North Hollywood, CA 91605
 Direct 323-461-6361
 Toll Free 800-321-3644
 www.luminyscorp.com

